




HD Radio Digital Signal Processor

- three-band processing
- adjustable crossover points
- AES or analog inputs
- complete control of virtually all audio parameters
- intuitive PC graphic interface
- analog and digital outputs
- multilevel password protection
- 44.1 or 48 kHz sample rates
- preset storage and recall
- four-band parametric EQ
- high pass, low pass & notch filter
- variable frequency de-esser
- expansion and multiband compression
- EQ / compressor signal chain swap
- automatic gain control (AGC)
- output limiter
- output gating
- quicksave and compare function
- full realtime readouts (FFT & LED ladders)
- HD latency FM delay
- takes up one rackspace
- TCP/IP remote control
- GPI preset trigger
- Ethernet preset trigger
- 24-bit sample rate converter
- de-correlator

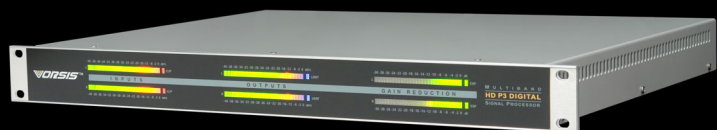

VORSIS™